
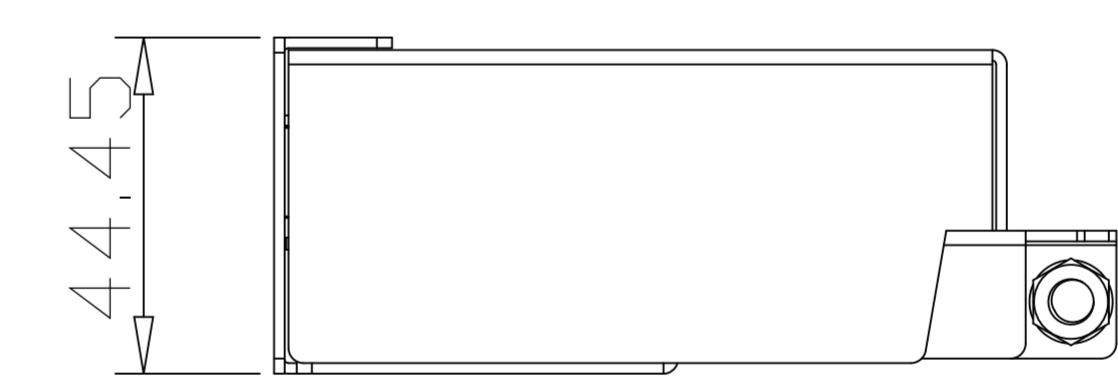


ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A	INITIAL RELEASE	2013.06.06	D Y H

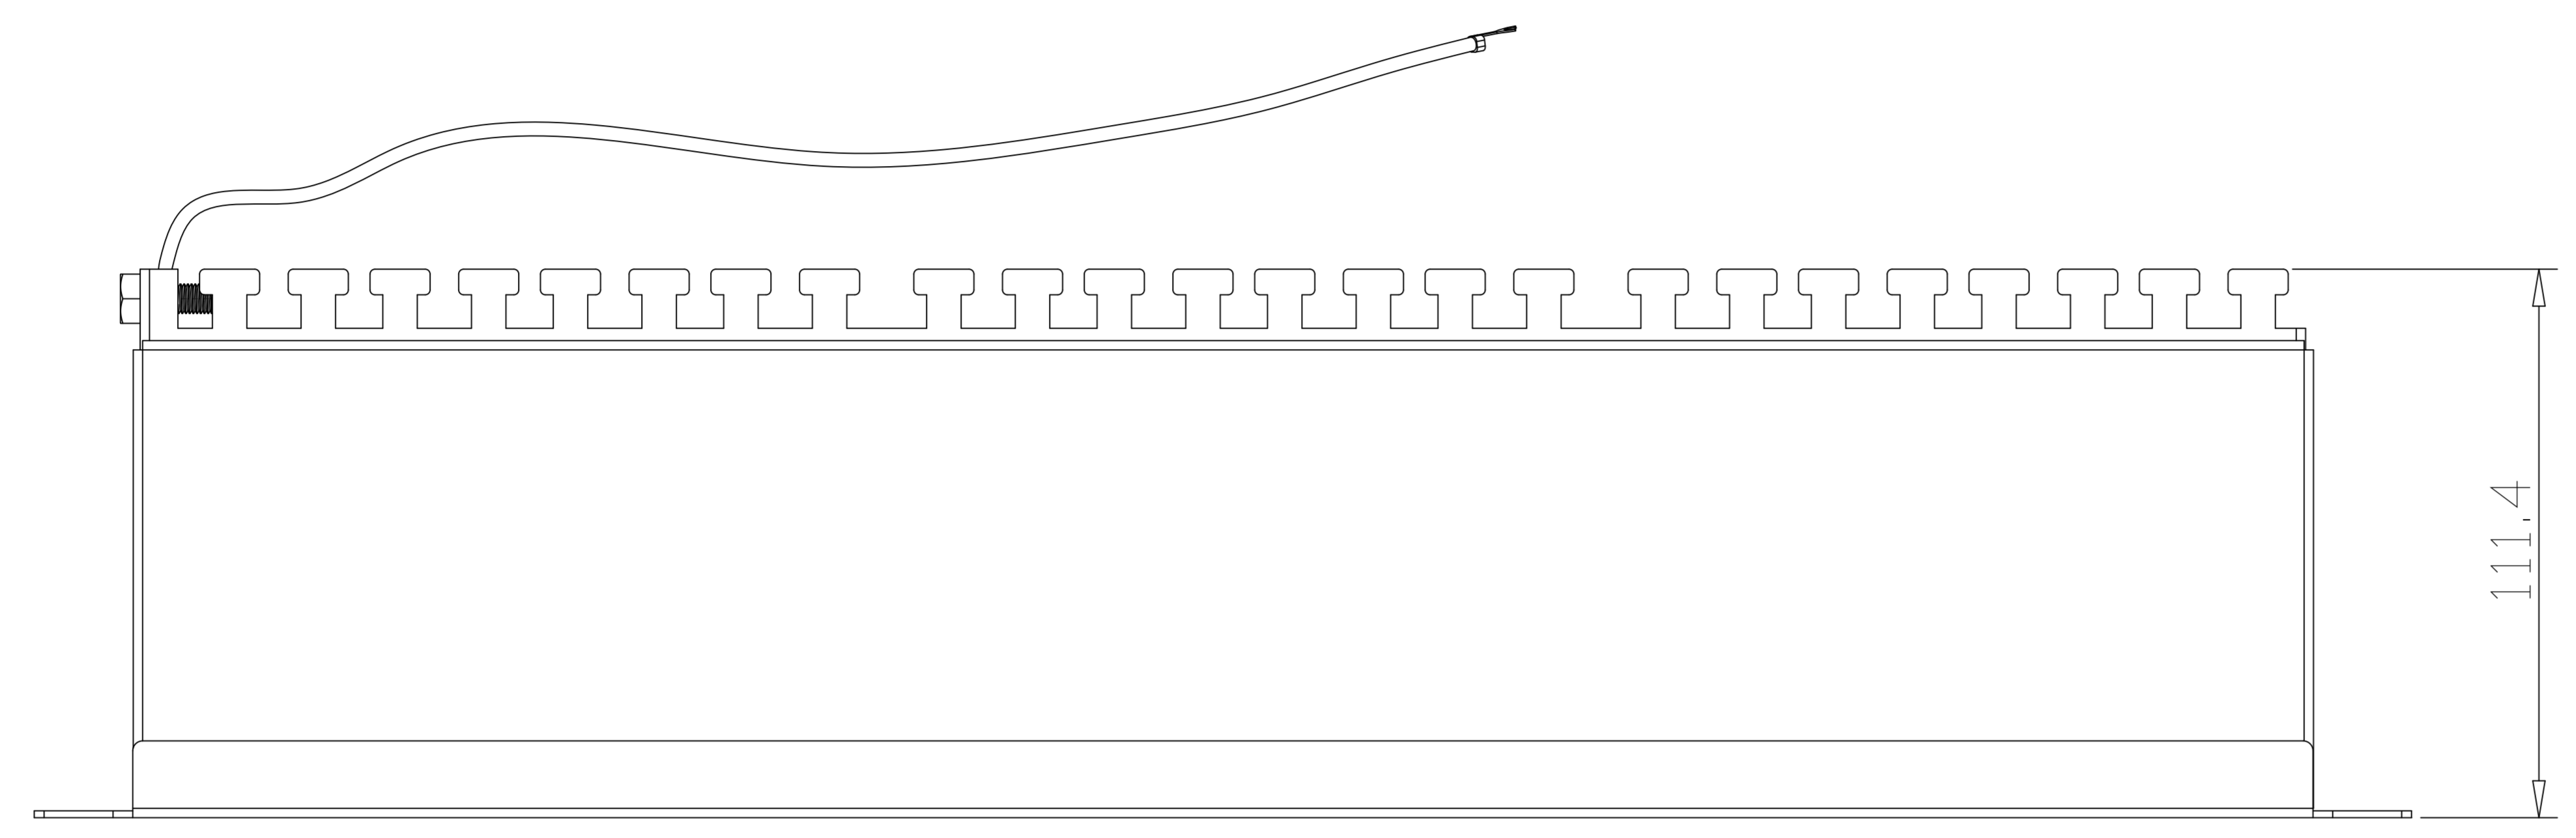

ELECTRICAL
 CURRENT RATING : 1.5A
 DIELECTRIC WITHSTANDING VOLTAGE : 1000VAC 60Hz
 INSULATION RESISTANCE : 500M Ω MIN.
 CONTACT RESISTANCE : 20m Ω MAX.
 TEST CRITERION: ISO calss Ea 90M PL2 \geq 2dB

MECHANICAL
 (1) Materials: PC+ABS, and polycarbonate
 (2) RJ45 Jack Contact: Phosphor bronze, 50u" Gold Plating
 (3) Iron Bracket: SPCC
 (4) Cavity conforms to FCC rules and Regulations Part 68

MODEL: 37666.1AV5	TITLE: Cat.6A STP Patch-Panel				
DRAWN: D Y H	PART NO.	UNIT		MM	
DESIGNED:	MATERIAL	SCALE		1 : 1	
CHECKED: MR 2013-6-6	FINISH	SHEET		1 OF 1	
APPROVED:	TOOLING NO.	SIZE	A3	REV.	A
	DWG NO.				