



## Patch Panel, Cat.5e


24-port, STP, 1U, RAL7035

Art.-Nr.	Type
ELN3251241	24-Port RJ45, 1U, RAL7035

- Certified in accordance with Cat.5e, 100 Mbps
- Acc. ISO/IEC 11801, EN50173
- TIA/EIA 568A, 568B and EN50173
- 24 x fully shielded RJ45 jacks
- 8-pole LSA terminal
- 19" fully shielded steel plate housing
- Strain relief via cable ties



RoHS  
compliant

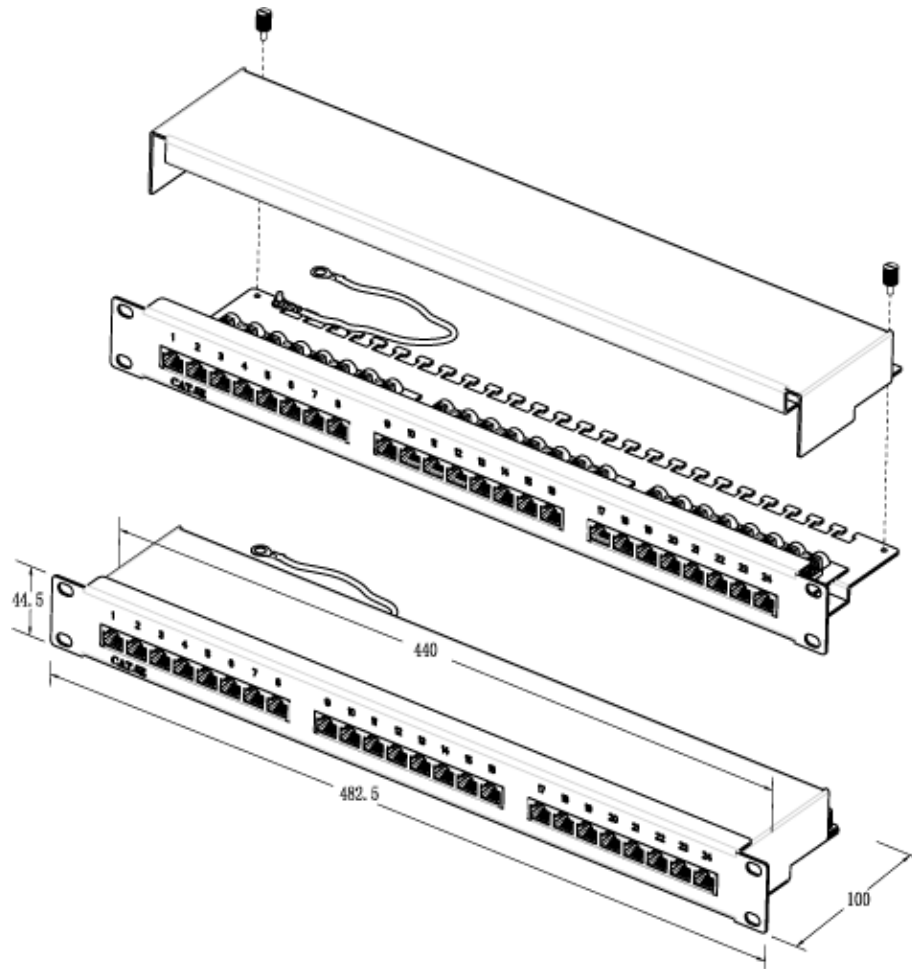

## Performance:

Meets Cat.5e EIA/TIA 568B.1 Standard

## Materials:

Bottom Panel : 1.5mm thickness Metallic Panel(SECC)/RAL7035

Upper Panel Cover : 1.0mm thickness Metallic Panel(SECC)/RAL7035

RJ-45 Jack : Housing-PBT / FTP 8P8C 6 micro inches gold plated

PCB : FR-4/1.6mm UL-94V0

IDC Body: Fireproof PC/ABS UL-94V0 with Colour Coded Printing T568A/B

IDC PIN: Bronze & Tinned

IDC Terminal: For 22-26 AWG Cable

## Electrical Specifications:

Insulation Resistance: 500 Mohms(min.)

Contact Resistance: 20 mohms(max.)

Current Rating:1.5 Amps.

DC Resistance: 0.1 ohms(max.)

Withstanding Voltage: 1000 VAC RMS @ 60Hz/1min

## Mechanical Specifications:

IDC Punch Down Cycle: Over 25 Cycles (min.)

RJ-45 Jack Insertion Cycle: Over 200 Cycles(min.)

## Accessory:

1. M3 Screw Set, for Pre-Assembled Ground Wire
2. Cable Tie(75x1.9mm)x24Pcs
3. Instruktion Sheet
4. Knurled Screws

RoHS  
compliant

Created BT	Date 13.04.10	<b>ECOLAN Patch Panel, CAT5e, 24-Port, shielded,1U,RAL7035</b>	
Last rev. BT	Date 13.04.10		
ITEM NO: ELN3251241			