


DATASHEET

Duplex Jumper LC-LC Uniboot

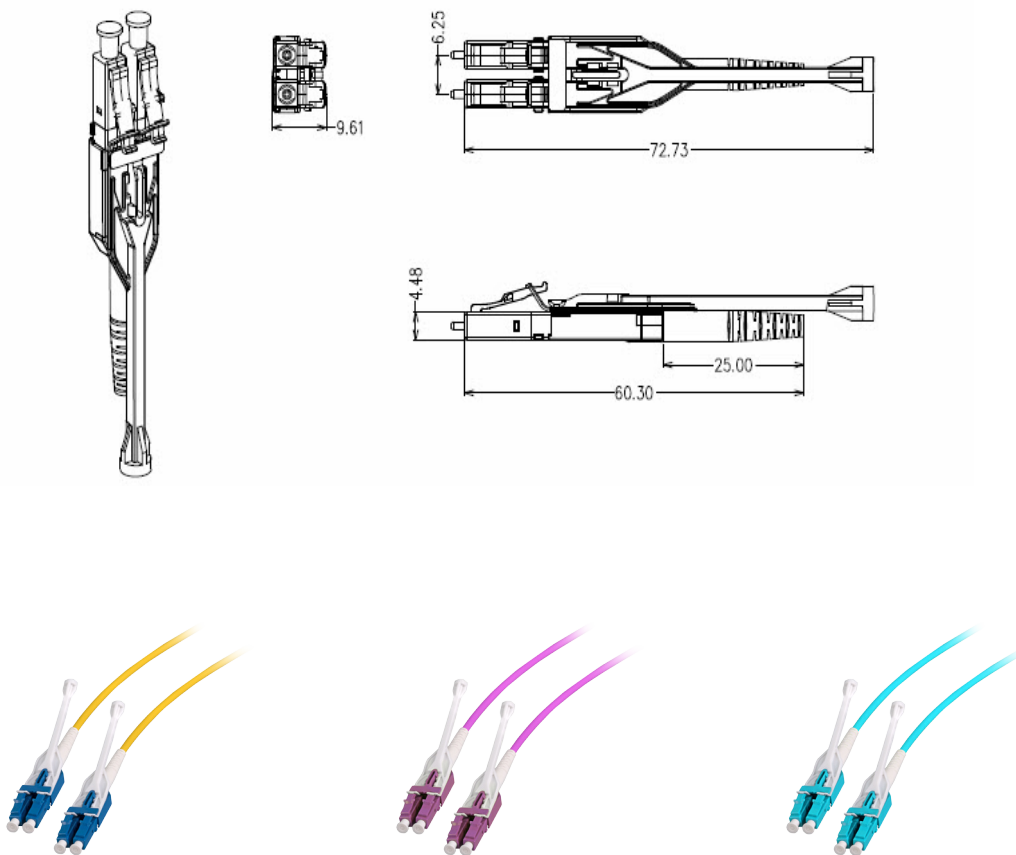

Specification

- LC HD Uniboot Connector with unlock latch
- Changable polarity without opening the connector
- Connectors in colour of the category (OM3, OM4, OS2)
- Length of 0,5m to 15m
- Conformance according to IEC 61754-20 and IEC 60793-2
- Delivery in Polybag with Measurement protocol

Art.-No.	Category	Type of connector	Colour of connector	Fiber	Insertion loss	Return loss	Operating temperature	Storage temperature
DJP-LLCOS2-UNI-xx	G657A1	LC	blue	9/125 μ	$\leq 0,3\text{dB @}1310\text{nm}$ $\leq 0,3\text{dB @}850\text{nm}$	$\geq 45\text{dB @}1310\text{nm}$ $\geq 45\text{dB @}850\text{nm}$	-20°C ~ 70°C	
DJP-LCLCOM3-UNI-xx	OM3		aqua	50/125 μ				
DJP-LCLCOM4-UNI-xx	OM4		erica violet					



Art.No.		File	DJP-LCLCxx-xx.indd		
Description	Duplex Jumper LC-LC Unitboot				
Created	Date	Last revision	Date	Proved	Date
JB	28.09.2017			BF	28.09.2017